


# Doors

## Series SRT/ND3

**BUILT-IN DOORS**

Article code: **See Table**

	Width (mm)	Height (mm)	Depth (mm)
Wall aperture	560	560	30
Door dimensions	553	553	-

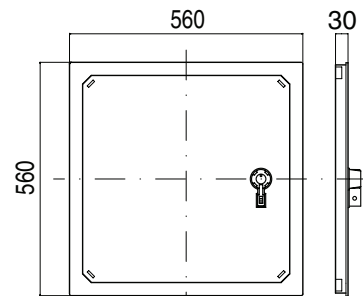

Code	Description
64836/A	With cross key lock Enel Triveneto-type
64836/B	With lock and Yale-type cylinder
64836/C	With triangular key lock Enel Tuscany-type - Emilia Romagna
64836/D	With cross key lock Enel Lazio-type - Marche - Abruzzo - Molise
64836/E	With triangular key lock Enel Piedmont-type - Valle D'Aosta - Liguria
64836/F	With lock with padlock only
64836/G	With Lock Series SC/1 - lined
64836/SK	Without Lock

### Technical characteristics:

- SMC (Fibreglass) Colour Grey RAL 7001.
- Fire resistance according to Enel specifications DS 4974: >80 Points.
- Superficial draught resistance according to regulations IEC 60112: PTI 500.
- Protection level: IP 43 according to CEI EN 60529 - IK10 according to CEI EN 62262.
- Reference to Enel Technical Specification: Table 2886 C (Lazio) n. 288612.

### General characteristics:

- The door is flush mounted and used for both new Low Voltage network nodes and to replace old road doors.
- Smooth surface, easy to remove in open position to facilitate access.
- Three-point lock with padlock, upon request it is possible to supply triangular, cross, or Yale-type keys.
- Predisposed to be built-in with brackets included.



SRT/ND3

### Accessories:

- 19000723 - Spare door with no padlock latch.
- 19000275 - Spare door with padlock latch.
- 19000762 - Textured spare door National-type.
- 19000454 - Locks Series SC/T2 (pag. 162).
- Vedi Tabella - Locks Series SC/YL (pag. 164).
- 19000644 - Locks Series SC/T1L (pag. 163).
- See Table - Locks Series SC/SL (pag. 165).
- S63790AW - Locks Series SC/ML (only on doors with Lock with padlock) (pag. 161).
- N0SF0010 - Locks Series SC/1 (only on National-type doors) (pag. 159).
- N0SF0011 - Locks Series SC/T(solo su sportelli tipo nazionale) (pag. 158).
- S4541Y12 - Lock with coding 12 Series SC/12 (only on National-type doors) (pag. 160).
- S4541Y21 - Lock with coding 21 Series SC/21 (only on National-type doors) (pag. 160).
- PALETSP - Rod kit 50X50.
- PALETNAZ - Rod kit 50X50 National.


# Doors

## Series SRT/ND4

### HINGED DOOR

Article code: See Table

	Width (mm)	Height (mm)	Depth (mm)
Wall Aperture	560	560	30
Door Dimensions	553	553	-



Code	Description
64835/A	With needle key lock Enel Triveneto-type
64835/B	With lock and Yale-type cylinder
64835/C	With triangular key lock Enel Tuscany-type - Emilia Romagna
64835/D	With needle key lock Enel Lazio-type - Marche -Abruzzo - Molise
64835/E	With triangular key lock Enel Piedmont-type
64835/F	With padlock latch only
S064828K	Without lock

#### Technical characteristics:

- SMC (Fibreglass) Colour Grey RAL 7001.
- Fire resistance according to Enel specifications DS 4974: >80 Points.
- Superficial draught resistance according to regulations IEC 60112: PTI 500.
- Protection level: IP 43 according to CEI EN 60529 - IK10 according to CEI EN 62262.
- Reference to Enel Technical Specification: Table 2886 C (Lazio) n. 288612.

#### General characteristics:

- The door is flush mounted and used for both new Low Voltage network nodes and to replace old road doors
- Smooth door, hinged externally with a 120° opening, easy to remove in open position to facilitate access.
- Three-point lock with padlock, upon request it is possible to supply triangular, cross, or Yale-type keys.
- Predisposed to be wall built-in with the support bars included.

#### Accessories:

- 19000518 - Spare door with no padlock latch.
- 19000724 - Spare door with padlock latch.
- 19000454 - Locks Series SC/T2 (pag. 162).
- Vedi Tabella - Locks Series SC/YL (pag. 164).
- 19000644 - Locks Series SC/T1L (pag. 163).
- See Table - Locks Series SC/SL (pag. 165).
- S63790AW - Locks Series SC/ML (only for doors with padlocks) (pag. 161).
- PALETSPT - Rod kit 50x50.



SRT/ND4